


DL系列自动软双铝泡罩包装机

DL Series Automatic Double-side Aluminum Foil Packing Machine

► 用途 (Application)

DL-150、200、300、400型多功能自动双铝包装机是我公司采用先进的自动控制技术，进行创新设计的新机型，具有科技含量高，结构新颖，效率高，噪声低，操作维修方便等特点。适用于医药，电子，食品等行业的片剂，胶囊以及电子元器件，糖果等块状物体的包装，能起到良好密封与避光作用。采用PLC控制，其充填，热封，切线，打批号，裁切，行程调整等工序均可任意设定，工作简便，包装速度更高，包装效果更好。

The machine is a new type one that we adopt fast-development automatic control technology and then create and design. It has the characteristics such as high technological content, novel structure, high efficiency,low noise, conveniently maintaining and mending. etc.  
It is suitable for the packing of troche, capsule and electronic component of vocations such as pharmacy, electron and food etc. And it is also suitable for packing of nubby objects such as candy.etc. It has a good photophobic and sealed function.  
It adopts PLC control. Its procedures such as filling. hot sealing,tangent printing batch code,cutting adjusting procedure,etc.Can be randomly set. So the work will be convenient, the speed of packing will be high,the effect of the packing will be better.

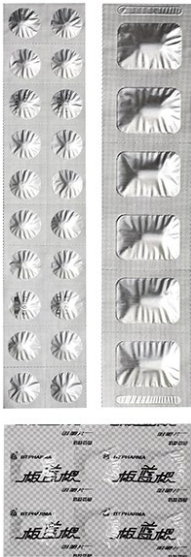

► 特点 (Features)

1. 采用先进的自动控制技术，确保设备运行的稳定性和高效性。

2. 结构新颖，具有高科技创新含量，体现现代工业设计理念。

3. 机器效率高，能够快速完成包装任务，提高生产效率。

4. 运行时噪声低，为工作环境提供安静的操作条件。

5. 设计上考虑日常操作和维修的便捷性，降低维护成本。

6. 通过可编程逻辑控制器（PLC）实现对包装过程的高度自动化控制。

7. 充填、热封、切线、打批号、裁切、行程调整等工序均可根据需求灵活设定。

8. 确保内含物的安全性和质量，特别适用于对光线敏感的产品。



1. The use of advanced automatic control technology ensures the stability and efficiency of equipment operation.

2. The structure is novel, with high-tech innovation content, reflecting the modern industrial design concept.

3. The machine is highly efficient, can quickly complete packaging tasks, and improve production efficiency.

4. Low noise during operation, providing quiet operating conditions for the working environment.

5. The design takes into account the convenience of daily operation and maintenance, reducing maintenance costs.

6. Highly automated control of the packaging process is achieved through a programmable logic controller (PLC).

7. Filling, heat sealing, cutting, batch numbering, cutting, stroke adjustment and other processes can be flexibly set according to needs.

8. Ensure the safety and quality of the contents, especially for products that are sensitive to light.

► 技术参数 (Technical Parameters)

参数ITEM	型号TYPE	DL-150	DL-200	DL-300	DL-400
辊筒转速 Speed of Roller	rollet/min	7-15	7-15	7-15(无级)	7-15(无级)
生产能力 Production Capacity	pleces/h	20000-60000	26000-80000	30000-120000	35000-120000
品大包装宽度 Max.Packing Width	mm	150	200	300	400mm (特殊要求另行设计) (Special requirements can be designed separately)
药月聚乙烯 PVC for Medicine	mm	0.05-0.1*150	0.05-0.1*200	0.05-0.10*300	0.05-0.10*400
铝望复合 Al-plsc Combined Flilm	mm	0.08*200	0.08*200	0.08-0.10*300	0.08-0.10*400
卷轴孔径 Hole Dlam. of Reel	mm	Dia.40-45	Dia.40-45	70-75	70-75
电热功率 Electrical Heating Power	kw	2	3	380V/2kw*2	380V/2kw*2
外形尺寸 Overall Size	mm	1450*600*1700	1450*800*1700	1500*850*1670	1500*950*1670
机器净重 Net Weight		600	800	900	900